

LOTO

Magnetic Track

LOTO è un compatto sistema di illuminazione in bassa tensione con apparecchi illuminazione fissati magneticamente.
LOTO fornisce una vasta scelta ai lighting designer e architetetti, e poter cambiare la direzione della luce da diretta a indiretta, creando una atmosfera unica negli spazi.

Una vasta scelta di apparecchi con il semplice sistema magnetico di installazione, dal disegno minimale, permettono di fornire uno stile elegante ad ogni progetto, e di poter facilmente cambiare la tipologia di illuminazione del locale.

LOTO is compact lighting track system with magnetically installed luminaries.
LOTO provides great choices for designers and architectures to simply change the light direction from the wall to the ceiling and back, blurring the borders and creating new magnificent spaces and incredibly unique atmosphere.

Wide choice of luminaires, with their sharp minimalist design, enables to provide elegance and style for any project, as long as magnetic installation makes it easy to change the light of the room.



LOTO

Magnetic Track

NEW





CODE	POWER	CRI	LUMEN OUTPUT	INPUT SUPPLY	DALI DIMMABLE
LOTO-S-SPOT	8W	90	650	48V	OPTIONAL

CE IP20

ANGLE 14°



6.5W 14° 3000K

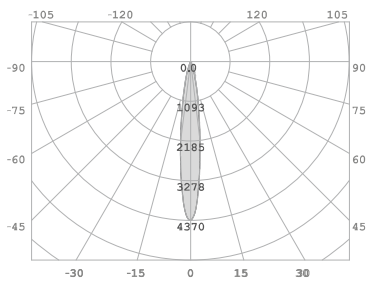

6.5W 14° 3000K



LOTO

Magnetic Track

NEW







CODE	POWER	CRI	LUMEN OUTPUT	INPUT SUPPLY	DALI DIMMABLE
LOTO-S-LINE-300-48W	10W	90	800	48W	OPTIONAL
LOTO-S-LINE-600-48W	20W	90	1600	48W	OPTIONAL
LOTO-S-LINE-900-48W	30W	90	2400	48W	OPTIONAL
LOTO-S-LINE-1200-48W	40W	90	3200	48W	OPTIONAL
LOTO-S-LINE-1500-48W	50W	90	4000	48W	OPTIONAL

CE IP20

ANGLE L



10.8W L 3000K

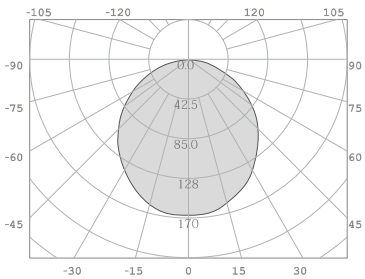

LOTO

Magnetic Track

NEW







CODE	POWER	CRI	LUMEN OUTPUT	INPUT SUPPLY	DALI DIMMABLE
LOTO-S-ON-5	6W	90	450	48V	OPTIONAL

CE IP20

ANGLE L



5W L 3000K

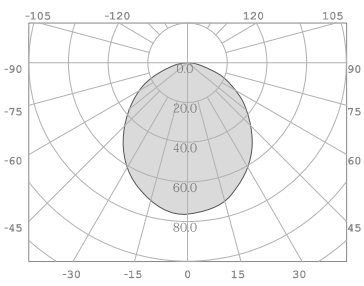

LOTO

Magnetic Track

NEW



CODE	POWER	CRI	LUMEN OUTPUT	INPUT SUPPLY	DALI DIMMABLE
LOTO-SOSP-10	10W	90	800	48V	OPTIONAL

ANGLE 21°



17W 21° 3000K

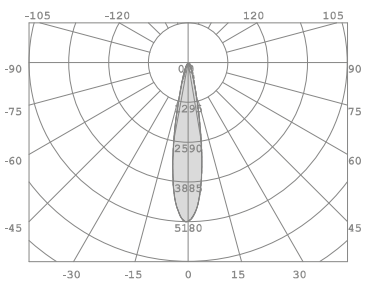

LOTO

Magnetic Track

NEW





CODE	POWER	CRI	LUMEN OUTPUT	INPUT SUPPLY	DALI DIMMABLE
LOTO-S-SPOT-17	17W	90	1500	48V	OPTIONAL

CE IP20

OPTICS:

OPTICS:

ANGLE 21°



17W 21° 3000K

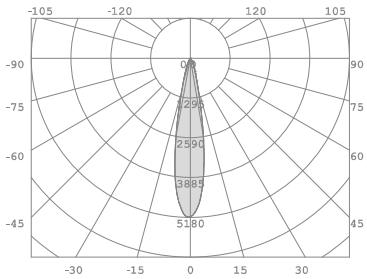

LOTO

Magnetic Track

NEW





CODE	POWER	CRI	LUMEN OUTPUT	INPUT SUPPLY	DALI DIMMABLE
LOTO-M-SPOT-30	30W	90	2500	48V	OPTIONAL

OPTICS:

OPTICS:

ANGLE 20°



33W 20° 3000K

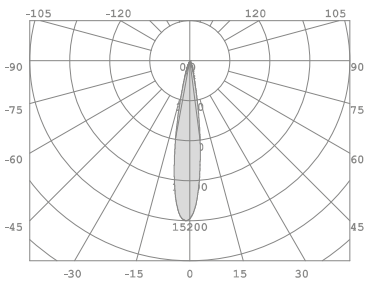

LOTO

Magnetic Track

NEW

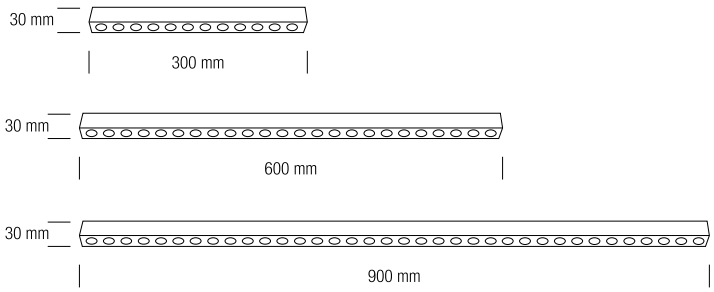

CODE	POWER	CRI	LUMEN OUTPUT	INPUT SUPPLY	DALI DIMMABLE
LOTO-LINE-LENS-300	12W	90	1000	48V	OPTIONAL
LOTO-LINE-LENS-600	24W	90	2000	48V	OPTIONAL
LOTO-LINE-LENS-900	36W	90	3000	48V	OPTIONAL

CE IP20

ANGLE L



5W L 3000K

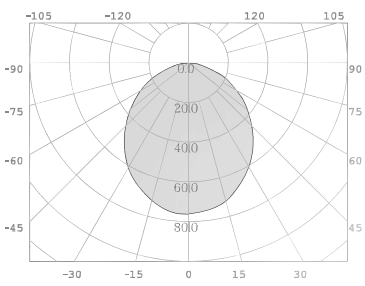

LOTO

Magnetic Track

NEW





LOTO

Magnetic Track



LOTO

Magnetic Track



ARCHITECTURAL
LIGHTING

LOTO

Magnetic Track





LOTO

Magnetic Track

NEW

MICROSOSPENSIONE CON OTTICA A BASSO ABBAGLIAMENTO, CON CAVO COASSIALE, DISPONIBILE CON ROSONE, INCASSATO O ADATTATORE DA BINARIO.

MICROSUSPENSION WITH LOW GLARE OPTICS, WITH COAXYAL CABLE. AVAILABLE WITH CANOPY, RECESSED OR MAGNETIC ADAPTER.





CODE	POWER	CRI	LUMEN OUTPUT	INPUT SUPPLY	DALI DIMMABLE
LOTO SOSP 8 - Magn	8W	90	700	350 mA	OPTIONAL
LOTO SOSP 8 - Canopy	8W	90	700	350 mA	OPTIONAL

CE IP20

36°



LOTO

Magnetic Track

NEW

MICROSOSPENSIONE CON OTTICA AD ALTA EMISSIONE, CON CAVO COASSIALE, DISPONIBILE CON ROSONE, INCASSATO O ADATTATORE DA BINARIO.

MICROSUSPENSION WITH HIGH EMISSION OPTICS, WITH COAXYAL CABLE. AVAILABLE WITH CANOPY, RECESSED OR MAGNETIC ADAPTER.





CODE	POWER	CRI	LUMEN OUTPUT	INPUT SUPPLY	DALI DIMMABLE
LOTO SOSP 10 - Magn	10W	90	1200	350 mA	OPTIONAL
LOTO SOSP 10 – Canopy	10W	90	1200	350 mA	OPTIONAL

CE IP20

12°



24°



36°



PROFILI

Magnetic Track

Accessori
Accessories

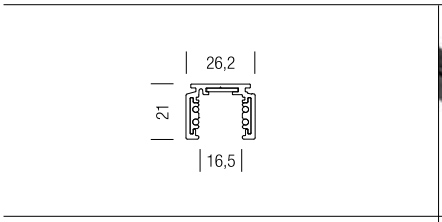



Binario standard superficiale 4 conduttori a bassa tensione.
Low tension standard ceiling track with 4 conductors.

CODE

9500/B-ST1

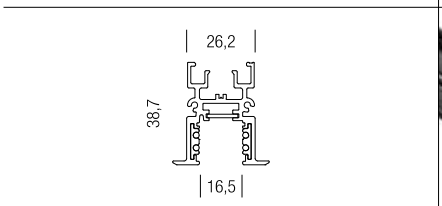



Binario a incasso con bordo 4 conduttori a bassa tensione.
Low tension recessed track with trim and 4 conductors.

CODE

9500/B-ST8

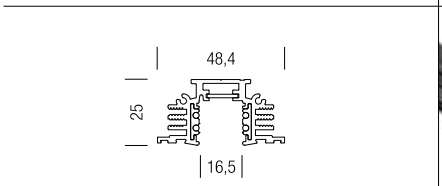



Binario incasso trimless 4 conduttori a bassa tensione.
Trimless low tension recessed track with 4 conductors.

CODE

9500/B-ST3

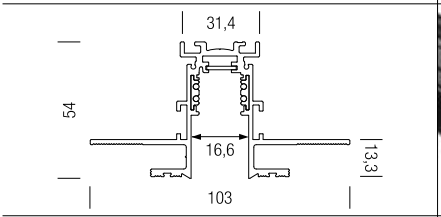



Binario incasso trimless 4 conduttori a bassa tensione.
Trimless low tension recessed track with 4 conductors.

CODE

9500/B-ST10

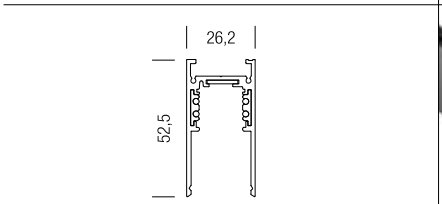



Binario a doppia emissione 4 conduttori a bassa tensione.
Double emission low tension recessed track with 4 conductors.

CODE

9500/B-ST2

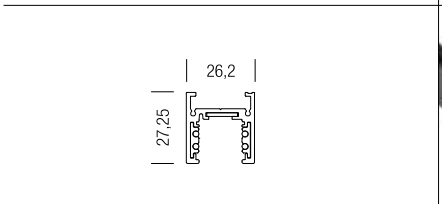



Binario standard superficiale 4 conduttori a bassa tensione.
Low tension standard ceiling track with 4 conductors.

CODE

9500/B-ST6

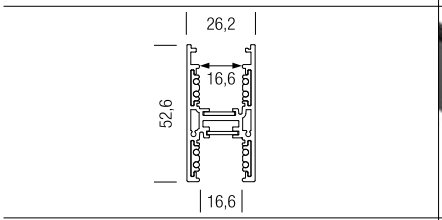



Binario doppia emissione 4 conduttori a bassa tensione.
Double emissione Low tension track with 4 conductors.

CODE

9500/B-ST7

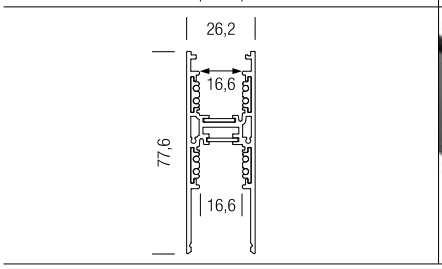



Binario doppia emissione 4 conduttori a bassa tensione.
Double emissione Low tension track with 4 conductors.

CODE

9500-1/B-ST9

Accessori
Accessories



Adattatore magnetic piccolo.
Small magnetic adapter.

CODE

Loto_adat_sm



Adattatore magnetic grande.
Big magnetic adapter.

CODE

Loto_adat_gr



Connessione magnetica linear.
Linear magnetic joint.

CODE

Loto_joint



Adattatore magnetic doppio.
Doppio magnetic adapter.

CODE

Loto_adat_dou



Terminale vivo alimentazione.
Terminal live Feed.

CODE

Loto_feed



Connessione magnetica a L.
Linear magnetic joint.

CODE

Loto_L_joint



Connessione meccanica a L.
L Mechanical Joint joint.

CODE

Loto_L _mjoint