MICRO

Collezione di micro faretti con Power-Led Cree in alluminio e lenti ottiche ad alta efficienza.

Microspotlights collection in aluminium with Cree Power-Leds and high efficiency optical lenses.











Ø 25 mm





Ø 45 mm



H 25 mm

Faretto ad incasso in metallo con finitura in bianco gesso. Alimentatore elettronico non incluso.
Recessed metal spotlight with white gypsum finishing. Driver not included.

CODE	ELECTRIFICATION	POWER SUPPLY	OPTICS	CRI	COLOUR TEMP.	HOLE DOWNLIGHT	DRIVER
W-1108	Power-Led 1 x 1W	350 mA	40°	80	3000°K	Ø 18 mm	700 mA

IP40

Faretto ad incasso in metallo con finitura in bianco gesso. Alimentatore elettronico non incluso.
Recessed metal spotlight with white gypsum finishing. Driver not included.

CODE	ELECTRIFICATION	POWER SUPPLY	OPTICS	CRI	COLOUR TEMP.	HOLE DOWNLIGHT	DRIVER
W-1101	Power-Led 1 x 3W	700 mA	40°	80	3000°K	Ø 40 mm	700 mA

IP40



MICRO







Faretto ad incasso in metallo con finitura in bianco gesso. Alimentatore elettronico non incluso.
Recessed metal spotlight with white gypsum finishing. Driver not included.

CODE	ELECTRIFICATION	POWER SUPPLY	OPTICS	CRI	COLOUR TEMP.	HOLE DOWNLIGHT	DRIVER
W-1102	Power-Led 1 x 3W	700 mA	40°	80	3000°K	Ø 40 mm	700 mA



IP40

MICRO

Faretto da incasso con controcassa da laterizio con ottica asimmetrica ideale come segnapasso per l'illuminazione di corridoi e scale.

Recessed light with wall frame for brick walls or plasterboard walls with asymmetric optics ideal as courtesy lighting of corridors and stairs.







Faretto ad incasso con controcassa da laterizio con ottica asimmetrica ideale come segnapasso per l'illuminazione di corridoi e scale.
Recessed light with wall frame for brick walls/plasterboard walls rick with asymmetric optics ideal as courtesy lighting of corridors and stairs.

CODE	ELECTRIFICATION	POWER SUPPLY	OPTICS	CRI	COLOUR TEMP.	CUT HOLE FOR PLASTERBOARD	CUT HOLE FOR CONCRETE WALL
W-1190	Power-Led 3W	220V AC Led	Ambiental	80	3000°K	Ø 70 mm	100x100 mm

IP40

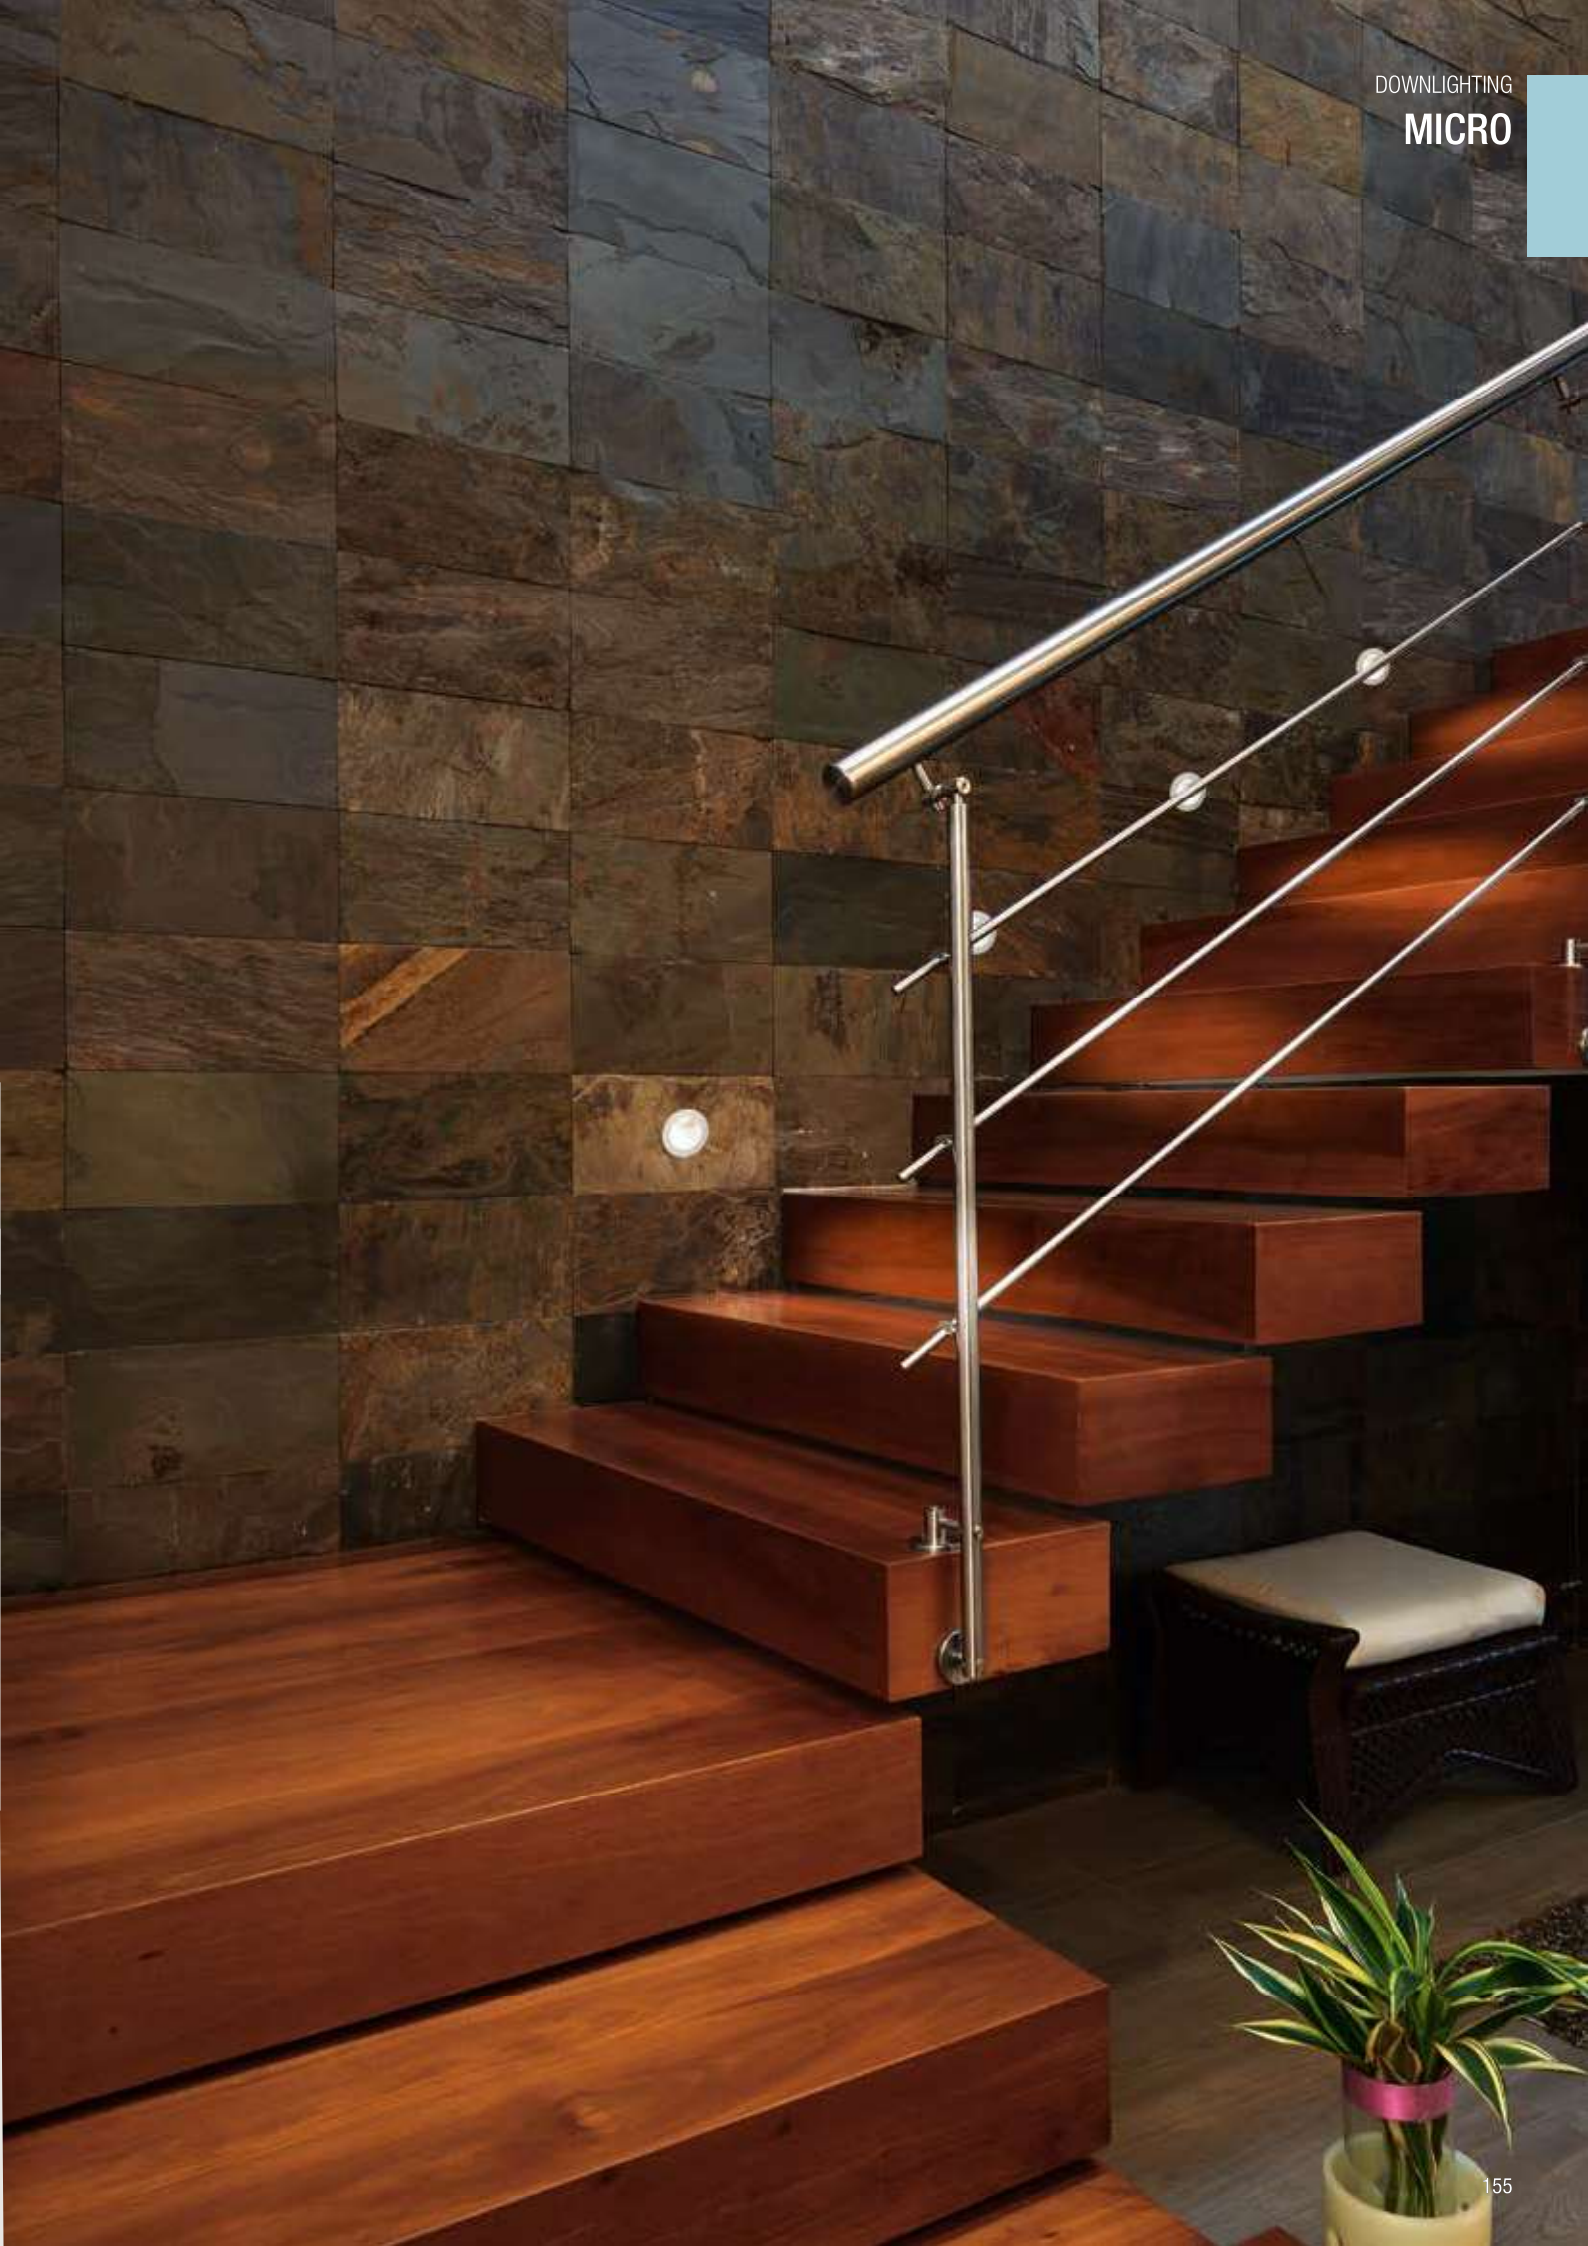

MICRO













Faretto ad incasso con controcassa da laterizio con ottica asimmetrica ideale come segnapasso per l'illuminazione di corridoi e scale.
Recessed light with wall frame for brick walls/plasterboard walls rick with asymmetric optics ideal as courtesy lighting of corridors and stairs.

CODE	ELECTRIFICATION	POWER SUPPLY	OPTICS	CRI	COLOUR TEMP.	CUT HOLE	DRIVER
W-1191	Power-Led 3W	700 mA	Ambiental	80	3000°K	Ø 42 mm	700 mA

IP54





Faretto ad incasso in metallo con finitura in bianco gesso. Alimentatore elettronico non incluso.
Recessed metal spotlight with white gypsum finishing. Driver not included.

CODE	ELECTRIFICATION	POWER SUPPLY	OPTICS	CRI	COLOUR TEMP.	HOLE DOWNLIGHT	DRIVER
W-1126	Power-Led 1 x 3W	700 mA	40°	80	4000°K	Ø 38 mm	700 mA

IP40







Faretto ad incasso in metallo con finitura in bianco gesso. Alimentatore elettronico non incluso.
Recessed metal spotlight with white gypsum finishing. Driver not included.

CODE	ELECTRIFICATION	POWER SUPPLY	OPTICS	CRI	COLOUR TEMP.	HOLE DOWNLIGHT	DRIVER
W-1219	AC Led 5W	220V	32°	80	3000°K	Ø 75 mm	350 mA

IP65





Faretto ad incasso in metallo con finitura in bianco gesso. Alimentatore elettronico non incluso.
Recessed metal spotlight with white gypsum finishing. Driver not included.

CODE	ELECTRIFICATION	POWER SUPPLY	OPTICS	CRI	COLOUR TEMP.	HOLE DOWNLIGHT	DRIVER
W-1132	Power-Led 1 x 3W	700 mA	40°	80	3000°K	Ø 45 mm	700 mA



IP40